

# PROLIAD

LED LIGHTING


Light quality:



Color temperature:



Output: 4100 lm  
Peak: 17307 cd  
Power: 48,3 W  
PF: 0,96

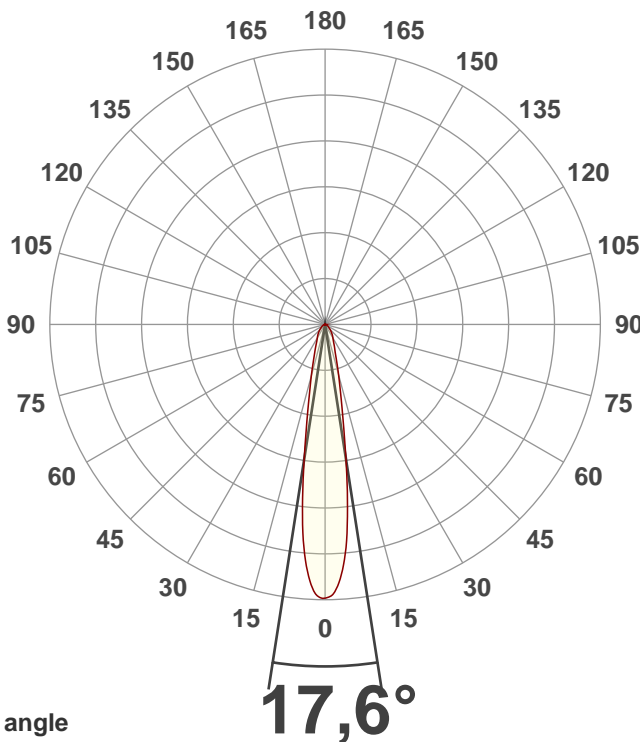

Beam angle

Product name:  
**Spotlight XL XT M19503050CCA  
AZW12L02**

Date and time:  
**30-9-2020 12:39:21**

Item number:  
**900 000xxx**



Additional information:  
**-XT M19803050CCA  
-76mm Optic Spot**



Color




CIE1931  
x: 0,442  
y: 0,408

Spectra

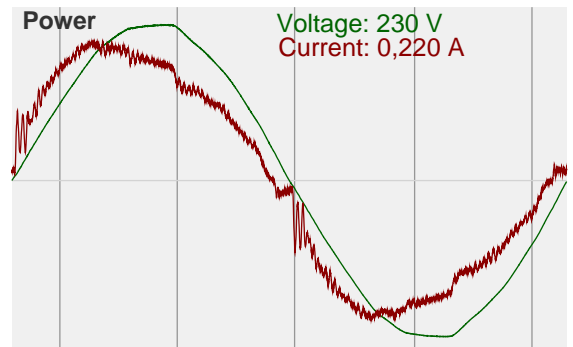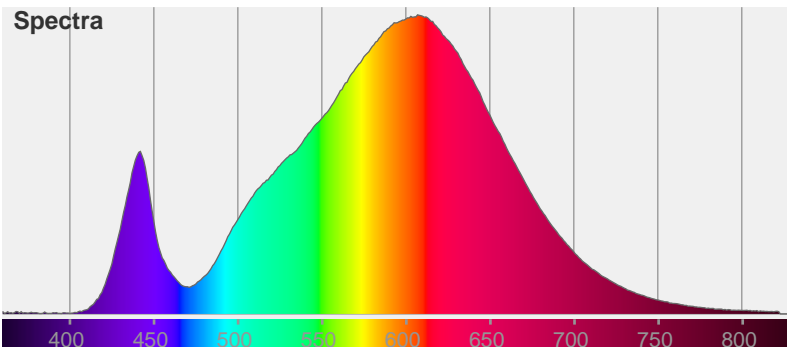


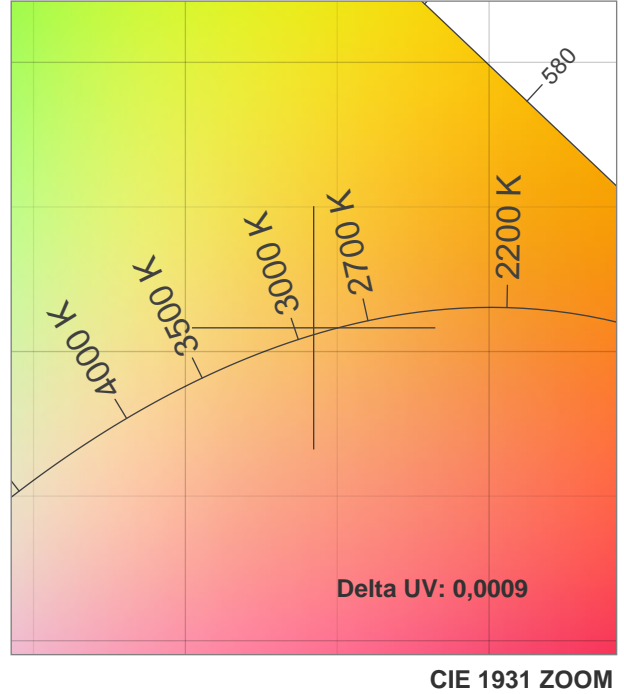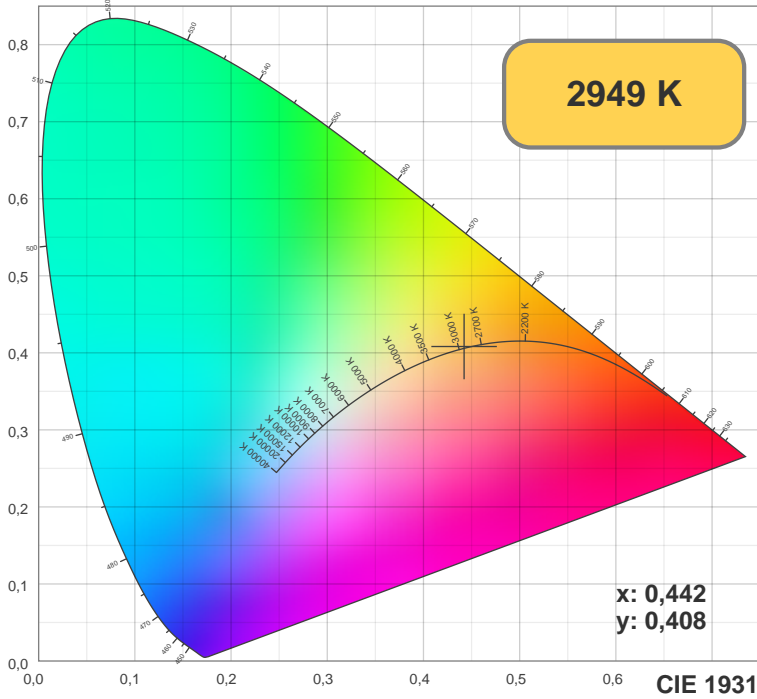

TM30: 78,5

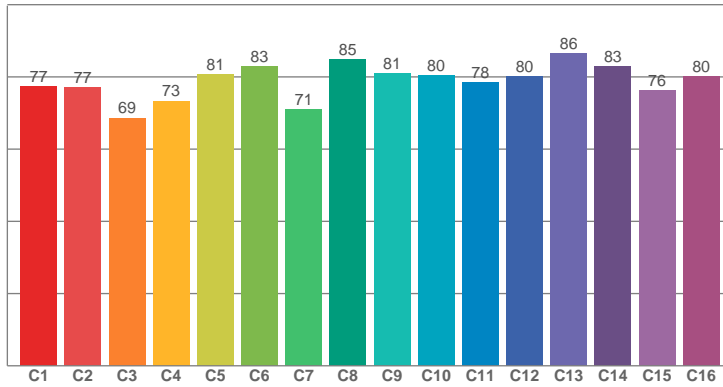

CRI: 81,0 (R1-R8)

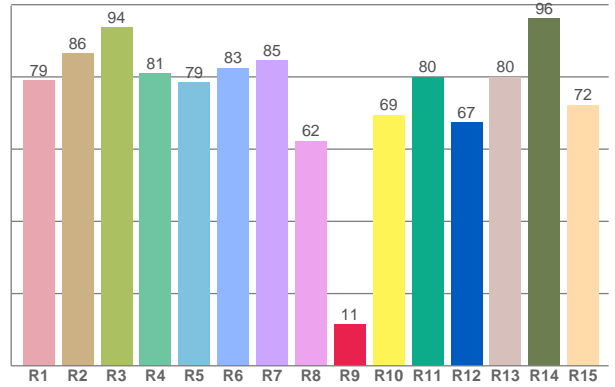

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
78,97	86,45	93,80	81,00	78,51	82,52	84,57	62,30	11,42	69,45	80,03	67,35	79,96	96,17	72,20


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
77,29	77,08	68,61	73,32	80,63	82,81	70,94	84,91	80,98	80,32	78,44	80,06	86,46	82,82	76,17	80,15

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
72,69	96,59	81,97	79,47	79,21	76,55	79,39	85,17	95,97	85,65	83,62	82,13	81,91	70,98	71,48

CQS: 80,0

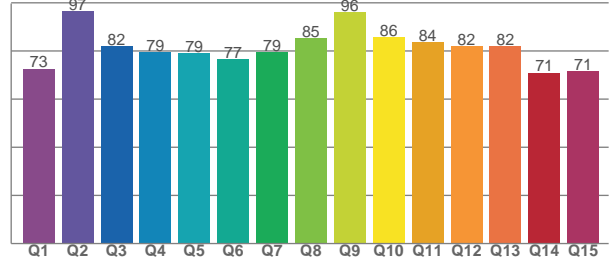

## Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
2949 K	81,0	11,4	78,5	99,4	80,0	0,4	0,4	0,3	0,3	0,0009

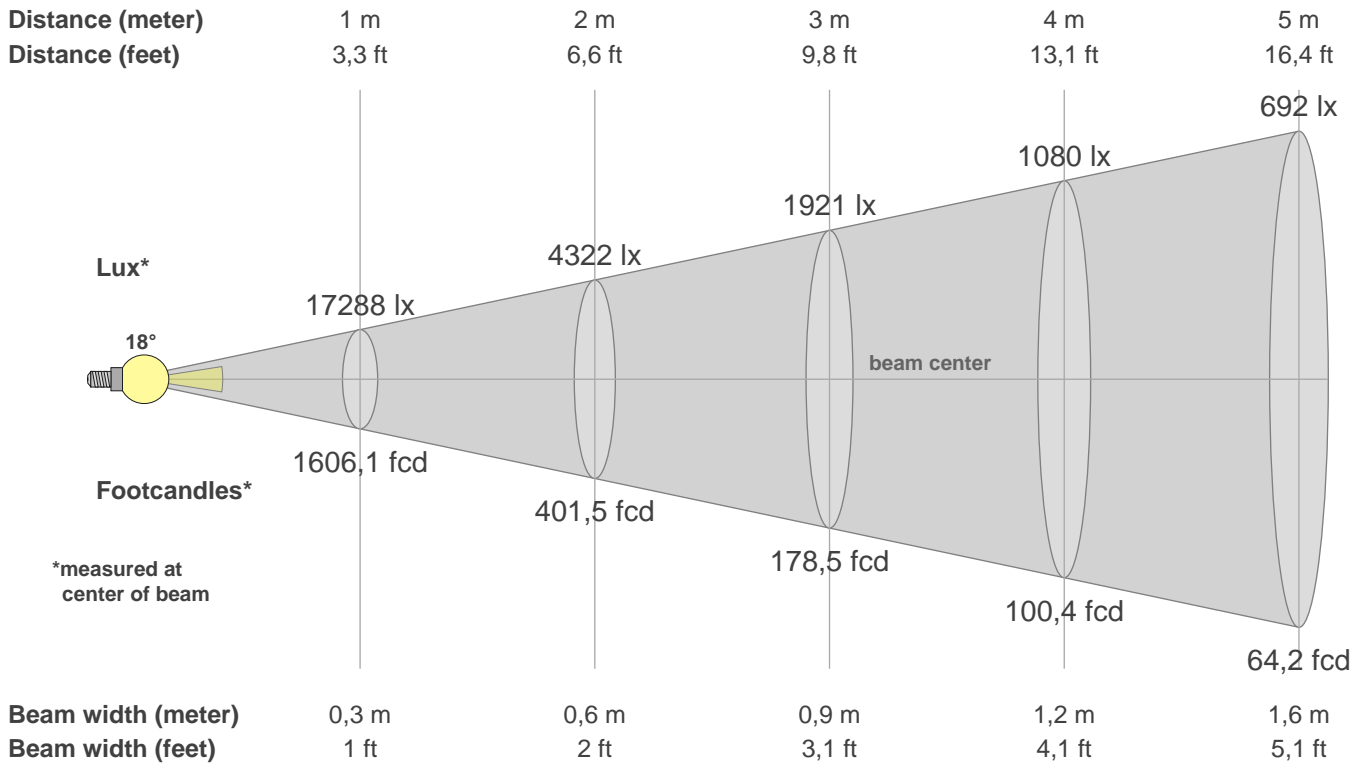

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17,3K	16,9K	15,6K	13,2K	10,0K	7,0K	5,0K	3,8K	2,9K	2,3K	1,9K	1,6K	1,4K	1,2K	1,1K	1,0K	0,9K	0,8K	0,7K	0,7K
100%	98%	90%	77%	58%	40%	29%	22%	17%	13%	11%	9%	8%	7%	6%	6%	5%	5%	4%	4%

### Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17,3K	16,9K	15,6K	13,2K	10,0K	7,0K	5,0K	3,8K	2,9K	2,3K	1,9K	1,6K	1,4K	1,2K	1,1K	1,0K	0,9K	0,8K	0,7K	0,7K
100%	98%	90%	77%	58%	40%	29%	22%	17%	13%	11%	9%	8%	7%	6%	6%	5%	5%	4%	4%

### Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17,3K	17,0K	15,7K	13,4K	10,0K	7,0K	5,0K	3,8K	3,0K	2,4K	1,9K	1,6K	1,4K	1,2K	1,1K	1,0K	0,9K	0,8K	0,8K	0,7K
100%	99%	91%	77%	58%	40%	29%	22%	17%	14%	11%	10%	8%	7%	6%	6%	5%	5%	4%	4%

### Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
17,3K	17,0K	15,7K	13,4K	10,0K	7,0K	5,0K	3,8K	3,0K	2,4K	1,9K	1,6K	1,4K	1,2K	1,1K	1,0K	0,9K	0,8K	0,8K	0,7K
100%	99%	91%	77%	58%	40%	29%	22%	17%	14%	11%	10%	8%	7%	6%	6%	5%	5%	4%	4%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
17,6°	42,4°	92,2°	92,4%	82,8%


**Flicker curve (Complete sampled flicker signal)**



**Flicker frame (frame of one period)**

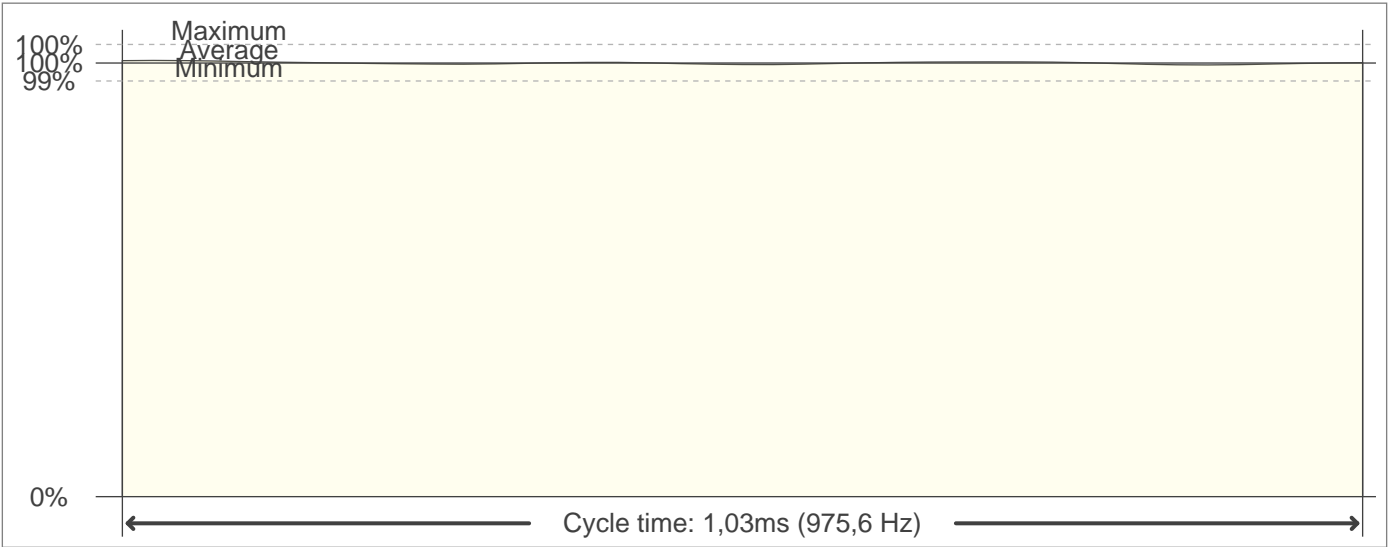

**Flicker FFT (frequency scope of flicker curve)**

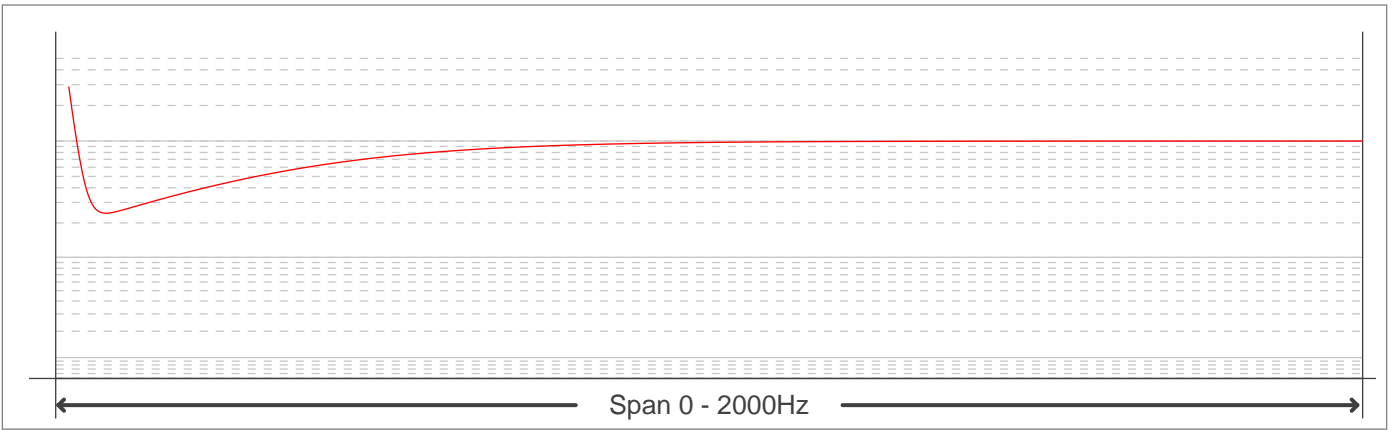

**Flicker results:**

Flicker frequency:	975,61 Hz
Flicker index:	0
Flicker percentage:	1,2 %
SVM: (Visual flicker)	0

**Flicker conditions:**

Sample Rate	40000 samples/second
-------------	----------------------